

PK 18001-EH

High Performance

PALFINGER CRANE



KT
protected

**Paltronic
50**
controlled

RRC
Radio Remote Control
operated

ISC
Integrated Stability Control
monitored



AOS
Active Oscillation Suppression
inside

A true PALFINGER

The PK 18001 EH impresses operators with its flexibility and high efficiency. Versatility is its trademark. With the appropriate accessory units, it can be employed for an even broader array of jobs. The clamshell bucket, fly-jib or workman's basket turns the crane into a multifunctional all-rounder. Remote control and oil cooler are part of the standard equipment.

Single Link Plus and E-HPLS technology

PK 18001 EH High Performance

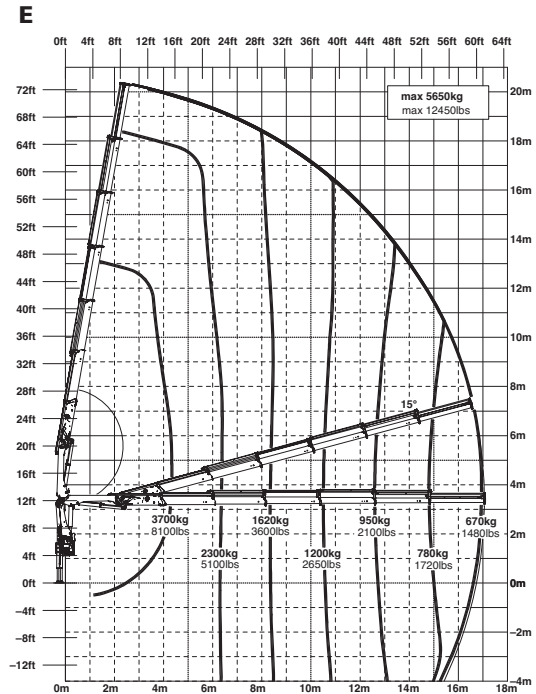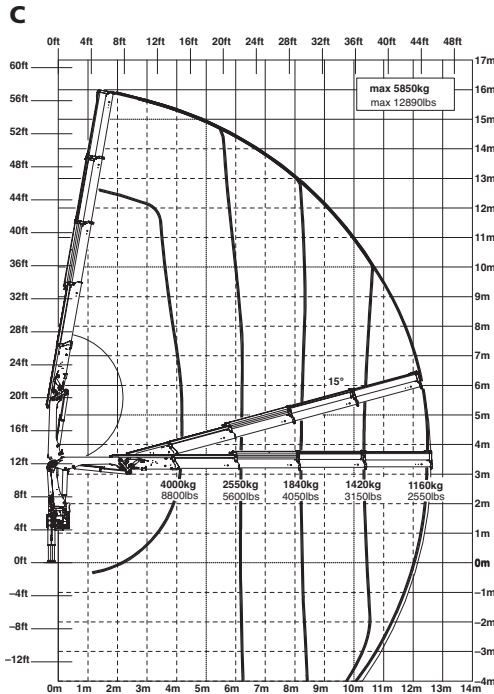

Technical Specifications (EN 12999 H1-B3)

Max. lifting moment	17.8 mt/174.6 kNm	128730 ft.lbs
Max. lifting capacity	6200 kg/60.8 kN	13670 lbs
Max. hydraulic outreach	17.1 m	56' 1"
Max. manual outreach	19.1 m	62' 8"
Slewing angle	420°	
Slewing torque	2.0 mt/19.6 kNm	14470 ft.lbs

Stabilizer spread	std. 5.0 m/16' 5"	max. 6.6 m/21' 8"
Fitting space required (std.)	0.83 m	2' 9"
Width folded	2.50 m	8' 2"
Max. operating pressure	350 bar	5075 psi
Recommended pump capacity	from 60 l/min to 80 l/min	15.9 US gal./min to 21.1 US gal./min
Dead weight (std.)	1850 kg	4080 lbs

